

PX108-6F Power Xtender

Use with Digitrax Series 6 1 Amp Decoders Equipped with 6 pin Function Harness

HO Scale0.33 F Capacitance
Use on 10-18V Track Power

Features:

- Keeps locos running during intermittent power interruptions resulting from dirty or bad track.
- Keeps sound from dropping out due to power interruptions.
- Hold up time varies based on actual decoder load & track conditions.
- For use with Digitrax 1 Amp Series 6 decoders.
- Easy to add to Digitrax decoders with 6 pin function harness.
- Plug N' Play installation with no CV configuration required.

Parts List:

1 PX108-6F function Harness

1 Instruction Sheet

1 PX108 Power Xtender

Installation Instructions:

The PX108-6F keeps locomotives running in situations where power to the locomotive is interrupted due to dirty, dead or bad track. The sound harness makes installation easy with no soldering required.

Simply follow these instructions:

- Remove the existing 6 pin function harness from the decoder. If using additional functions leads on the function harness these must be disconnected too.
- 2. Reconnect any function leads on the PX108-6F function harness as needed.
- 3. Plug the 6 pin PX108-6F function harness into the 6 pin socket on the Series 6 decoder. Plug the 2 pin plug from the PX108-6F sound harness into its socket on the PX108 Power Xtender. The plugs are keyed to fit easily into their sockets in only one orientation.
- 4. Verify that all the connections are secure prior to operating the locomotive.
- 5. Use on 10-18V track power only.

Digitrax manuals and instructions are updated periodically. Please visit www.digitrax.com for the latest version.



PX108-6F Power Xtender

Digitrax Power Xtender with 6 pin function harness

Figure 1: Removing the original function harness.





Figure 2: Installing the PX108-6F Power Xtender



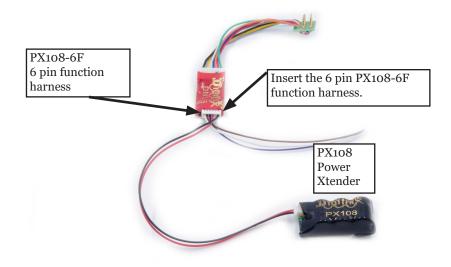

Made in the USA

 ϵ

2443 Transmitter Road Panama City, FL 32404 www.digitrax.com

Need Support? helpdesk.digitrax.com

