


Digitrax Decoder Index

DN141E2

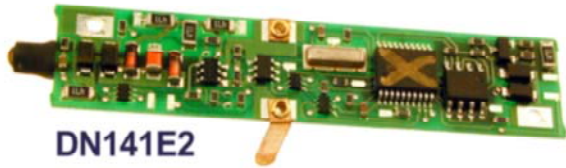

[DN141E2 Instructions](#) [Digitrax Decoder Manual](#)

Physical Size	Board Replacement for ER N Sharknose 0.35" x 3.36" w/LED x 0.13" 8.9mm x 85.4mm x 3.3mm	Current Rating	1.0/1.5 Amps	LEDs	1 Yellow
----------------------	---	-----------------------	--------------	-------------	----------

# Functions	4	Function Current Rating	125mA	Function Type	FX
Prod Date	09-25-2001	Discontinued	Current	Replaced By	N/A

[FX Motor Isolation Protection Note](#)

CV#	Feature	Default	Range	Notes
2 Digit and 4 Digit Addressing				
01	2 Digit Decoder Address	003/x03	001-127	
17	4 Digit Address Hi Byte	000/x00	0128-9983	CV17 & 18 are used together
18	4 Digit Address Lo Byte	000/x00	0128-9983	
29	Configuration Register	006/x06	Table 29	
Configuration Register				
29	Configuration Register	006/x06	Table 29	
	Address Selection, 2 or 4 digit	2 Digit	2 or 4 Digit	
	Normal Direction of Travel (NDOT)	Fwd	Fwd/Rev	
	Speed Step Control	28/128	14 or 28/128	
	Speed Table On/Off	Off	Speed Table On or Off	
	Analog Mode Conversion On/Off	On	On or Off	
LocoMotion™				
Acceleration & Deceleration				
03	Acceleration Rate	000/x00	000/x00 to 031/x1F	128 Steps
04	Deceleration Rate	000/x00	000/x00 to 031/x1F	128 Steps
Three Step Speed Table & Start Voltage				
02	Start Voltage	000/x00	000/x00 to 255/xFF	128 Steps
05	Maximum Voltage	000/x00	000/x00 to 255/xFF	128 Steps 000/x00, 001/x01 & 255/xFF= max voltage at step 28
06	Mid Point Voltage	000/x00	000/x00 to 255/xFF	128 Steps 000/x00 & 001/x01= straight line curve
28 Step Speed Tables -256 step resolution				
65	Kick Start value	000/x00		128 Step Interpolated
66	Forward Trim	000/x00		128 Step Interpolated

67	First Speed Table Entry	000/x00		128 Step Interpolated
68-93	28 Step Speed Table Entries	000/x00		128 Step Interpolated
94	Maximum Speed Table Step	000/x00		128 Step Interpolated
95	Reverse Trim	000/x00		128 Step Interpolated
29	Configuration Register	006/x06	Table 29	Set to enable speed tables
Torque Compensation & Switching Speed				
53	Used for FX in FX Decoders			Not Available
54	Torque Compensation Switching Speed			Not Available
DC Functions				
13	DC Functions ON	000/x00	Table 13	
FX Functions				
49	F0F, forward light effect white	000/x00	FX Effects Table	See Reversing Note
50	F0R, reverse light effect yellow	000/x00	FX Effects Table	See Reversing Note
51	F1, Function 1 green	000/x00	FX Effects Table	See F1/F2 Note
52	F2, Function 2 violet	000/x00	FX Effects Table	See F1/F2 Note
53	F3, Function 3 brown	000/x00		Not Available
54	F4, function 4 white/yellow	000/x00		Not Available
115	F5, Function F5 white/green	000/x00		Not Available
116	F6, Function F6 white/blue	000/x00		Not Available
62	FX Rate and Keep alive adjust	000/x00	000/x00 to 255/xFF	
63	Ditch Light Blink hold time	000/x00	000/x00 to 255/xFF	
Directional Headlights, Transponding, Split Field Motor				
61	Directional Headlight	000/x00	Table 61 Dir or Non-dir	
	Transponding	Off	Off or On See Table 61	
	Split Field Motor			Not Available
Scaleable Speed Stabilization				
55	Static Compensation	128/x80	000/x00 to 255/xFF	
56	Dynamic Compensation	048/x30	000/x00 to 255/xFF	
57	Speed Stabilizer-Droop	006/x06	000/x00 to 015/x0F	
SuperSonic				
09	Motor Frequency SuperSonic			Not Available
Advanced Consisting				
19	Advanced Consist Address	000/x000	000/x00 to 255/xFF	Default is OFF
21	Advanced Consist Function Control Override for F1-F8			Not Available
22	Advanced Consist Function Control Override for F0 & F9-F12			Not Available
Function Remapping				
33-46	Function Remapping CVs			Not Available
Decoder Factory Reset				
08	Reset Decoder to Factory Default CV Values			Not Available
IDs				
105	User Private ID #1	000/x00		
106	User Private ID #2	000/x00		
07	Version ID	240/xF0	Read Only	
08	Manufacturer ID	129/x81		

Information provided here is correct to the best of our knowledge.
Please report any errors or omissions, to info@digitrax.com

Return to Digitrax [Decoder Index Page](#)

Return to Digitrax [Home Page](#)

This page, and all contents, are Copyright (C) 2003 by Digitrax, Inc., Norcross, GA, USA.

Updated 01-15-03.