


Digitrax Sound Decoder Specification Sheet

SFX004

Soundbug Sound Only Decoder for DH156xx decoders and others

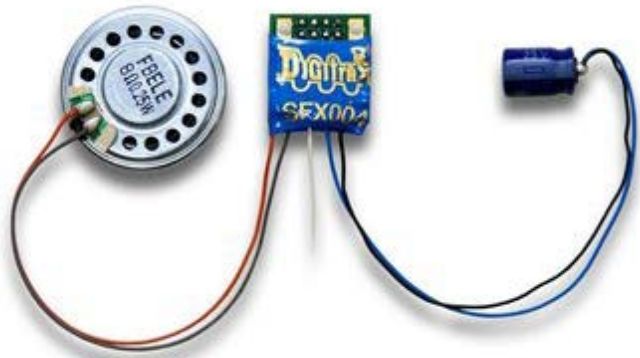

Physical Size	0.67" x .807" 17.10 mm x 20.49mm	Current Rating	n/a
Speaker Rating	32 Ohms	Speaker Size	28mm round
Capacitor	330uF (8.17mm round x 13.43mm high)	Factory Sound Scheme	Dual Generic Diesel and Generic Steam
Simultaneous Voices	3	Onboard Sound Storage Capacity	8

Interface	Decoder End	Wires	Locomotive End/Plug
Sound Bug			Sound Bug Plug

# Functions	0	Function Current Rating	N/A	Function Type	N/A
Prod Date	07-15-2007	Discontinued	Current	Replaced By	Current
MSRP	US\$49.99	Feature Set	Series 3	UPC	652667-20012-7

CVs used for this decoder

CV#	Feature	Default	Range	Notes
Locomotive Address CVs				
01	2 Digit Decoder Address	03	001-127	
17	4 Digit Address (High Byte)	00	0128-9983	CV17 & 18 are used Together to program the 4 digit address. Current production Digitrax throttles handle this automatically. See calculator below if separate values are needed by your system for programming 4 digit address
18	4 Digit Address (Low Byte)	00	0128-9983	
29	Configuration Register Controls Multiple Features	06	See CV29 Value Table Below	Must be set to a value that allows either 2 digit or 4 digit addressing
Configuration Register CV				
29	Configuration Register	06		
	Address Selection, 2 or 4 digit	2 Digit	2 or 4 Digit	
	Normal Direction of Travel (NDOT)	Fwd	Fwd/Rev	
	Speed Step Control	28/128	14 or 28/128	
	Speed Table On/Off	Off	Speed Table On or Off	
	Analog Mode Conversion On/Off	On	On or Off	
Locomotion CVs-Control Locomotive Motion Characteristics				
Acceleration and Deceleration				
03	Acceleration Rate	00	00 to 31	128 Steps
04	Deceleration Rate	00	00 to 31	128 Steps
Three Step Simple Speed Table & Start Voltage				
02	Start Voltage	00	00 to 255	128 Steps
05	Maximum Voltage	00	00 to 255	128 Steps 00, 01 & 255= max voltage at step 28
06	Mid Point Voltage	00	00 to 255	128 Steps 00 & 01= straight line curve
28 Step Speed Tables with 256 Step Resolution				
65	Kick Start value	00		128 Step Interpolated
66	Forward Trim	00		128 Step Interpolated
67	First Speed Table Entry	00		128 Step Interpolated
68-93	28 Step Speed Table Entries	00		128 Step Interpolated

94	Maximum Speed Table Step	00		128 Step Interpolated
95	Reverse Trim	00		128 Step Interpolated
29	Configuration Register	06 Speed Tables are disabled	See Above CV29	Must be set to a value that enables speed tables
Torque Compensation and Switching Speed				
53 FX ³	FX ³ Decoders do not use CV53	NA	NA	Not Available
53 FX	FX Decoders used CV53 to designate FX effect generated on F3-Brown Wire			See instruction sheet for the FX decoder you are using
54 FX ³	FX ³ Decoders use CV54 to control Switching Speed & Torque Compensation	00	00=SS Off, TC On 01=SS On, TC On 16=SS Off, TC Off 17=SS On, TC Off	
53 FX	FX Decoders used CV54 to designate FX effect generated on F4-White/Yellow Wire			See instruction sheet for the FX decoder you are using
Functions				
13	DC Functions ON Not Used in FX ³		Automatic	Not Used FX ³
FX³ Functions				
49	F0F, forward light effect white	00	See FX ³ section	
50	F0R, reverse light effect yellow	00	See FX ³ section	
51	F1, Function 1 green	00	See FX ³ section	
52	F2, Function 2 violet	00	See FX ³ section	
113	F3, Function 3 brown	00		Not Available
114	F4, function 4 white/yellow	00		Not Available
115	F5, Function F5 white/green	00		Not Available
116	F6, Function F6 white/blue	00		Not Available
62	FX Rate and Keep alive adjust	00	00 to 255	
63	Ditch Light Blink hold time	00	00 to 255	
	Master Light Switch			See FX ³ section
Directional Headlights, Transponding, Split Field Motor				
61	Directional Headlight	Directi onal	Map F0 Forward & Reverse	Not controlled by CV61 in FX ³ Decoders

			See CV61 Section	
	Transponding	Off	Off or On See CV61 Section	
	Split Field Motor	Off	Off or On See CV61 Section	For AC Motors
Scaleable Speed Stabilization (Back EMF)				
55	Static Compensation	128	00 to 255	
56	Dynamic Compensation	048	00 to 255	
57	Speed Stabilizer-Droop	006	00 to 15	
SuperSonic (Quiet Operation)				
09	Motor Frequency SuperSonic	00	00 to 255	Default is MAX
Advanced Consisting				
19	Advanced Consist Address	00	00 to 255	Default is OFF
21	Advanced Consist Function Control Override for F1-F8	00	See CV21-22 Section	
22	Advanced Consist Function Control Override for F0 & F9-F12	00	See CV21-22 Section	
Function Mapping				
33-46	Function Mapping CVs	00	See Function Mapping Section	
Decoder Reset to Default Values				
08	Reset Decoder to Factory Default CV Values	129	Set to 08 to reset all CV Values.	Set to 09 to reset all CV Values except 28 step speed table.
Decoder IDs				
105	User Private ID #1	00		User Defined
106	User Private ID #2	00		User Defined
07	Version ID	64	Digitrax Version ID	Read Only
08	Manufacturer ID	129	Digitrax	Not affected by reset

Generic Steam or Diesel Sound Scheme included with this decoder

Steam is based on recordings made by AJ & Zana Ireland on UP3985.

Copyright	Digitrax, Inc.	Date	11-6-2007
Project	steam_38a.jpg	SDF	Generic steam/diesel Scheme
Author	AJ Ireland	Type	Steam/Diesel
Simultaneous Voices	3		

Function Key Usage:

Function Key	Feature	Notes
Locomotive Address CVs		
F0	Lights	
F1	Bell	CV150 Selects Horn/Whistle Type
F2	Horn/Whistle	
F3	Coupler Crash	
F4	Air feature disable	F4 OFF enables pop-off drier and starts compressor
F5	Diesel=Dynamic Brake Fans Steam=Water Pump Turbine	
F6	Diesel=Manual Notch Up Steam=Blowdown	If CV155 is NOT 00
F7	Crossing Gate Air horn	Or Manual Notch Down, if CV155 is NOT 00
F8	Mute Control	F8 ON is muted, F8 OFF is unmuted
F9	Brake Squeal	
F10	Crossing Gate Air Horn Sequence or Diesel=Notch Down Steam=Wheel Slip	If CV155 is not 0 See CV155 below for how to set this up
F11	Diesel=Engine Hand Brake Steam=Greaser	
F12	Diesel= Available for user sounds Steam=Safety Blow off	
F13-F19		Available for user added sounds

Sound CVs Used for this .spj

CV#	Feature	Default Value	Value Range	Notes
CV58	Master Volume	09	00-15	0 = Maximum volume F8 used to mute sound
CV60	Sound Scheme Selection	00	00=Steam scheme 01=SD38-2 Diesel Scheme	
CV120	Read Only		Read Only	Manufacturer defined
CV121	Software Version	03	2 or higher	Not User Configurable
CV122	Product Type	12	Read Only	Read Only

CV123	Hardware Version	17	Read Only	
CV124	Flash Signature	2	Read Only	
CV125	16KB free blocks	0	Read Only	
CV126	FAT flags	7	Read Only	
CV127	Internal Flags	0	Read Only	
CV128	IPL Counter	0	Read Only	
CV129	Mode Control	0		0=standard DC mode 1=use relay in DC mode
CV130 to 139	Manufacturer defined in sound definition file (SDF)	Unique to Mfg	Unique to Manufacturer	Global Configuration Flags
CV132	Diesel Notch Rate	127		Notch 8 @ 44%
CV133*	Steam Chuff/CAM Configuration	63	1-127=driver diameter in inches 128=external cam input	
CV134*	Steam Gear Ratio Trim	32	1-32	32=100%
CV135	Volume When Muted	00	00-64	00=mute, 64=full volume
CV140 to 240	User defined in sound definition file (SDF)	Unique to SDF	Unique to SDF	CV# & CV value range are unique to each SDF
CV140	Prime Mover/Diesel Chuff Volume	60	00-64	
CV141	Bell Volume	25	00-64	
CV142	Horn/Whistle Volume	60	00-64	
CV143	Air Features Volume (Pop off, Drier, Compressor sounds)	30	00-64	
CV145	Misc Sounds Volume	40	00-64	
CV146	Bell Delay (24mS intervals)	7	01-100	
CV147	Drier Rate	2	01-64	1=approx. 2 seconds
CV148	Compressor/Air Pump Start Rate	30		
CV149	Compressor/Air pump run time	20		
CV150	Horn/Whistle Selector	00	00 = Standard 01 = Playable Volume 02 = Alternate	
CV151	Peak Speed To Allow Auto Coupler / Brake On Direction Change and F3 On	48	00-60	
CV152	Author ID Digitrax=0xDD/221	221	221	Not User Configurable
CV153	Project ID Steam/SD38_2a	5		Not User Configurable

CV154	Steam Blow Down/Safety Volume	60	0-64	
CV155	Notching/Slip Mode	00	00 = Automatic 01 = Semi-auto 02 = Manual	
CV156	Horn delay threshold	10		
CV160	Variant ID	4		Not User Configurable

Notes:

*CV134 and CV133 work together to control the loco's chuff rate.

Programming CV133 to a value between 1 and 127, initiates auto chuff. Auto chuff uses internal software to simulate driver chuff timing.

CV133's default value of 63, simulates a loco driver diameter of 63 inches. If you program the value to 32, you will double the chuff rate.

CV134 (gear ratio) also affects the auto chuff rate. CV134's default value of 32 assumes no gear reduction. Doubling this value to 64 simulates a 2:1 gear reduction (doubling the chuff rate).

Setting CV133 to a value of 128 activates the white cam input lead on the 10 pin sound harness. This lets you use a physical cam input installed in your locomotive to control chuffing. A chuff is triggered when a pulse greater than 6 volts or DCC track voltage is seen on the white cam input lead. This voltage must go off (to 0 volts) before the next chuff is triggered.

For CV155=01 semiautomatic notching, the prime mover lowest notch setting is set by the throttle speed setting. F6 (ON) can increase the notch and F7 (ON) will decrease the prime mover to the minimum notch set by current throttle setting.

Note: SFX004 and SFX0416 are 3.6V sound units that can use 8ohm speaker load for higher output levels.

Legacy Decoder Note: The SDH104K1 decoder is used in conjunction with FN04 (4 line FX³-type function decoder). SDH104K1 responds as per standard FX³ decoder (e.g. DH163D) for CV range 1-120. FN04 does not respond to/execute any CV programming in Sound CV range CV121-255. Both decoders have CV15/16 lock capability for advanced users.

Information provided here is correct to the best of our knowledge.